

SOUVLAKI

BINARIO Ø 25MM A 48V CON CONDUTTORI DI ALIMENTAZIONE E DI SEGNALE (DALI/CASAMBI) E SORGENTA A LUCE INDIRECTA

ASVBL 002 63 PLO

GENERAL

System
 Track
 IP20
 Lumen: 2217
 Interior
 Length (cm): 119

LED

MID POWER LED
 2.700 K
 CRI 90
 48V
 Macadam step 2
 LED Life L70 B50 > 54.000 h
 Classe Energetica: F

ELECTRICAL

48V 4,5A
 20,8 W
 Classe 3
 Driver included



OPTICAL | PHOTOMETRIC



Lightning Type: Indirect
 Light Distribution: Symmetric

COLOR

63, Bianco (opaco)



Ø 2,5

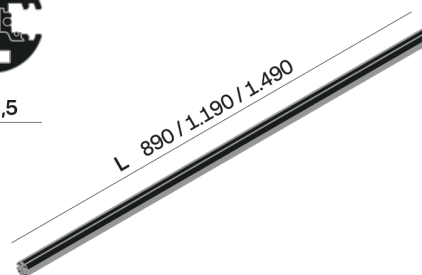

Discover
Souvlaki